







Stratum



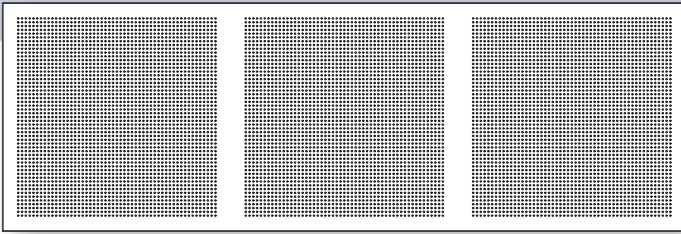

GypSorb Stratum panels are high density gypsum panels with a variety of perforation patterns and shapes outlined with non-perforated gypsum margins. Installation is made easy using a 4 sided taper design.

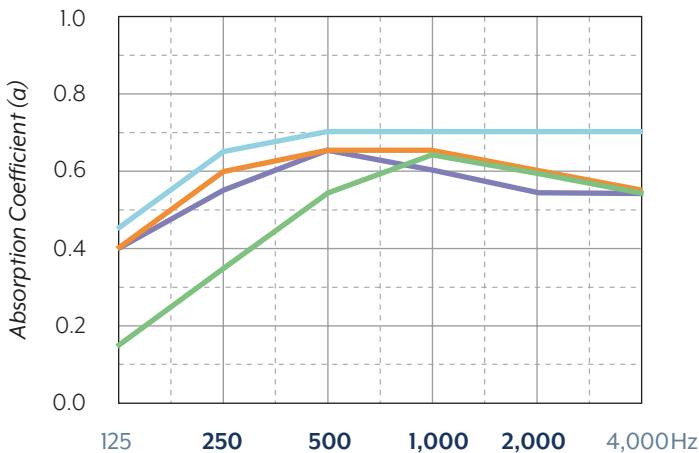


PERFORMANCE

-  A 2-s1, d0 (non-flammable) according to DIN EN 13501
-  Maximum Relative Humidity: 90%
-  Recycled Content: 96%
-  NRC: Up to .70



-  Cavity Depth = 65mm (~3")
-  Cavity Depth = 65mm (~3") with 50mm (~2") Mineral Wool
-  Cavity Depth = 200mm (~8")
-  Cavity Depth = 200mm (~8") with 50mm (~2") Mineral Wool

STRATUM MICRO M-1/3 927

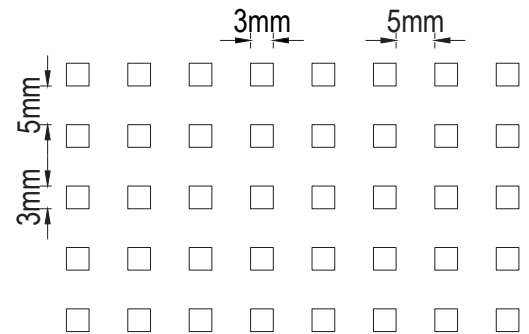


Not to Scale

CHARACTERISTICS

Perforation type:	3mm x 3mm (5mm o.c.)
Board Thickness:	1/2" (12.5mm)
Non-woven Fabric Backing:	Light Gray
Finish:	Unfinished paper face
Open Area:	9.8%
Weight:	1.88 lbs/s.f. MAX

AVAILABLE BOARD SIZES


900mm x 2700mm (~35.43" x 106.30") 

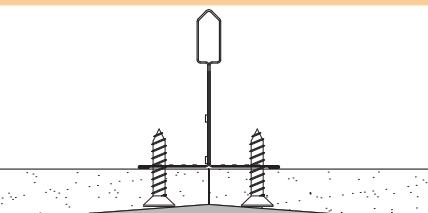

Factory tapers on all 4 edges of GypSorb Stratum panels. Joints are taped and filled with standard joint tape and compound.

Panel Layout

STRATUM MICRO M-1/3 927

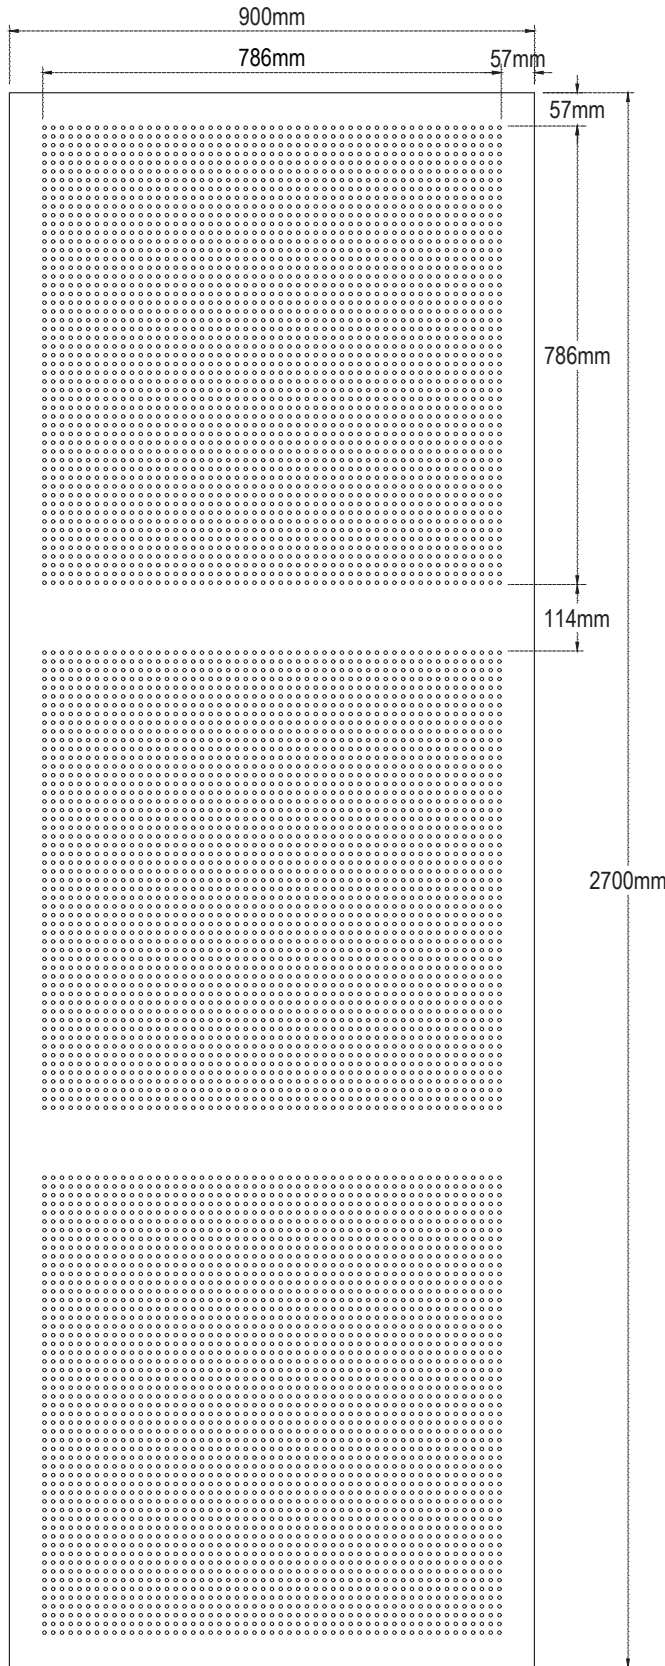

BOARD SIZE
900mm x 2700mm x 12.5mm
(~35.43" x 106.30" x 1/2")