



Stratum

GypSorb Stratum panels are high density gypsum panels with a variety of perforation patterns and shapes outlined with non-perforated gypsum margins. Installation is made easy using a 4 sided taper design.

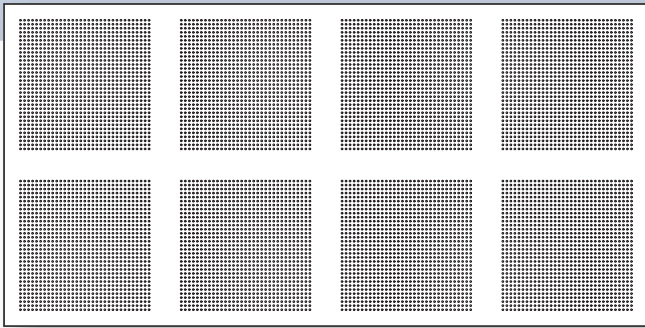


PERFORMANCE

- A 2-s1, d0 (non-flammable) according to DIN EN 13501
- Maximum Relative Humidity: 90%
- Recycled Content: 96%
- NRC: Up to .60

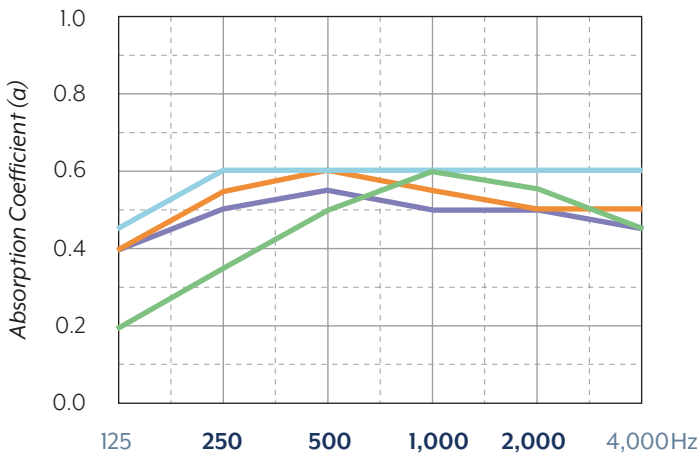


- Cavity Depth = 65mm (~3")
- Cavity Depth = 65mm (~3") with 50mm (~2") Mineral Wool
- Cavity Depth = 200mm (~8")
- Cavity Depth = 200mm (~8") with 50mm (~2") Mineral Wool

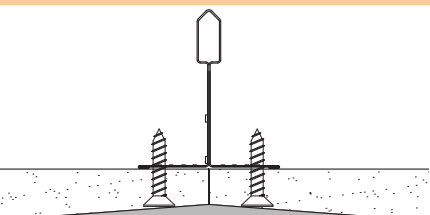

Factory tapers on all 4 edges of GypSorb Stratum panels. Joints are taped and filled with standard joint tape and compound.

STRATUM MICRO M-2/4 1224

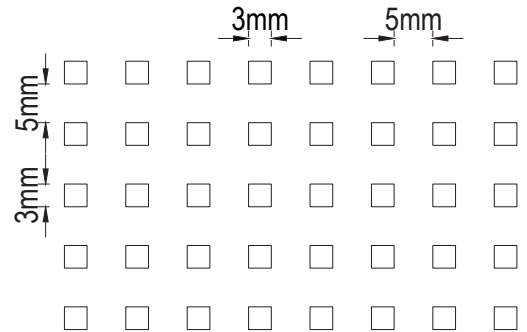

Not to Scale

CHARACTERISTICS


Perforation type:	3mm x 3mm (5mm o.c.)
Board Thickness:	1/2" (12.5mm)
Non-woven Fabric Backing:	Light Gray
Finish:	Unfinished paper face
Open Area:	8.4%
Weight:	1.88 lbs/s.f. MAX

AVAILABLE BOARD SIZES

1200mm x 2400mm (~47.24" x 94.49")

Panel Layout

STRATUM MICRO M-2/4 1224

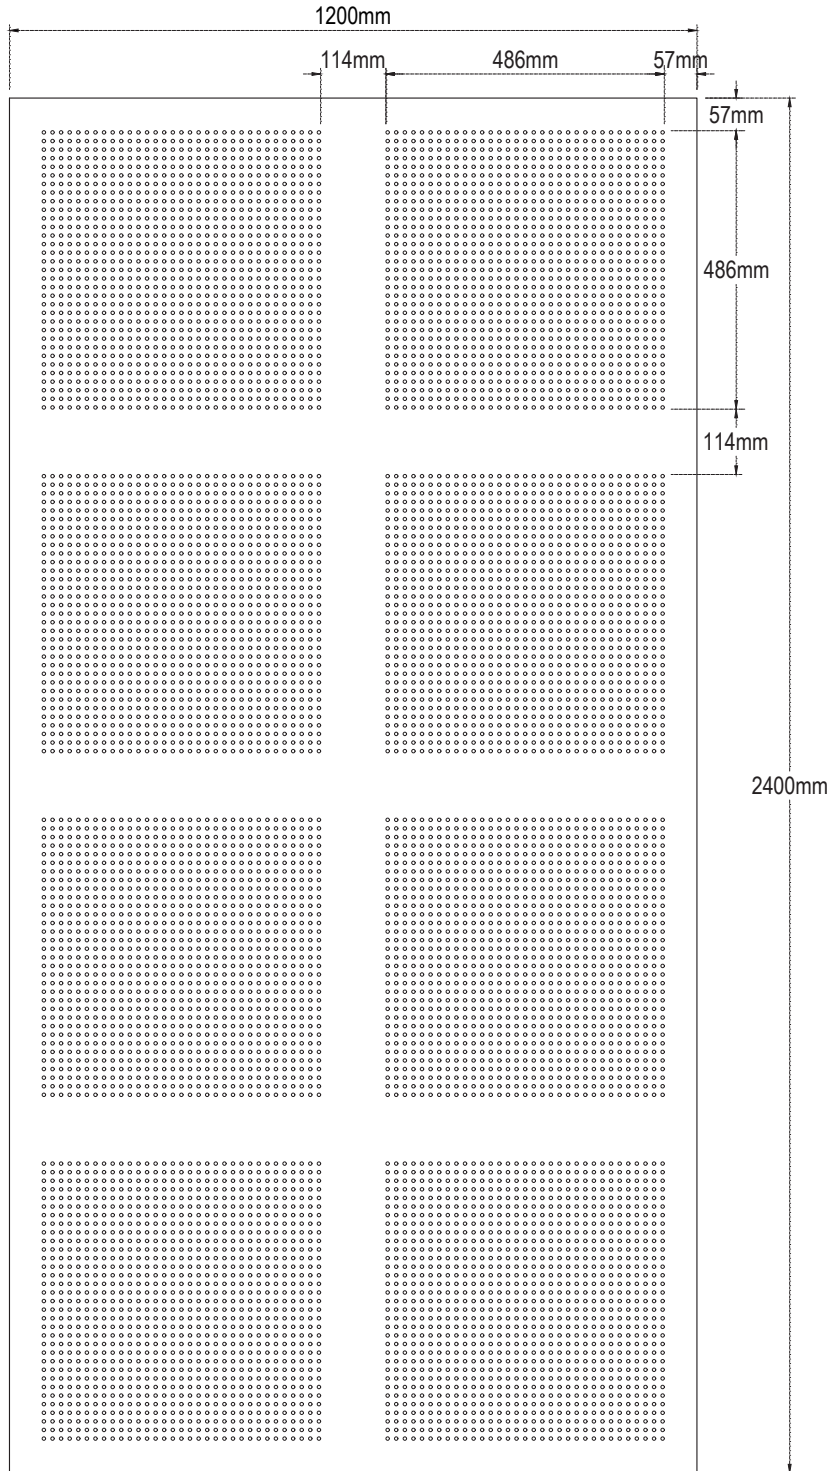

BOARD SIZE

1200mm x 2400mm x 12.5mm
(~47.24" x 94.49" x 1/2")