

# Stratum

Gypsorb Stratum panels are high density gypsum panels with a variety of perforation patterns and shapes outlined with nonperforated gypsum margins. Installation is made easy using a 4 sided taper design.


### **PERFORMANCE**

A 2-s1, d0 (non-flammable) according to DIN EN 13501

Maximum Relative Humidity: 90%


Recycled Content: 96%

)) NRC: Up to .60

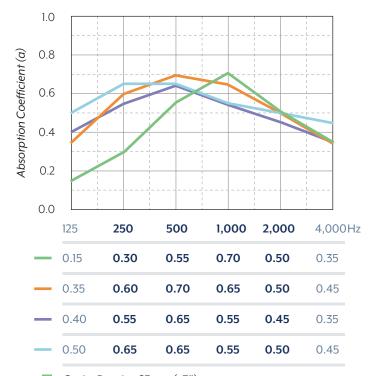

- Cavity Depth = 65mm (~3")
- Cavity Depth = 65mm (~3") with 50mm (~2") Mineral Wool
- Cavity Depth = 200mm (~8")
- Cavity Depth = 200mm (~8") with 50mm (~2") Mineral Wool

# STRATUM ROUND R-2/4 1224




Not to Scale

## **CHARACTERISTICS**

Perforation type:	6mm x 6mm (15mm o.c.)
Board Thickness:	1/2" (12.5mm)
Non-woven Fabric Backing:	Gray
Finish:	Unfinished paper face
Open Area:	8.6%
Weight:	1.88 lbs/s.f. MAX

#### **AVAILABLE BOARD SIZES**


1200mm x 2400mm (~47.24"x 94.49")



Factory tapers on all 4 edges of Gypsorb Stratum panels. Joints are taped and filled with standard joint tape and compound.



# STRATUM ROUND R-2/4 1224

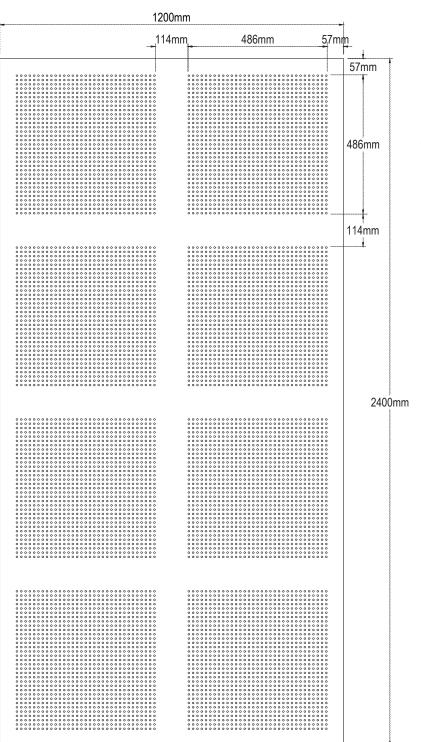

### **BOARD SIZE**

1200mm x 2400mm x 12.5mm (~47.24" x 94.49" x 1/2")

