



# Stratum

Gypsorb Stratum panels are high density gypsum panels with a variety of perforation patterns and shapes outlined with non-perforated gypsum margins. Installation is made easy using a 4 sided taper design.

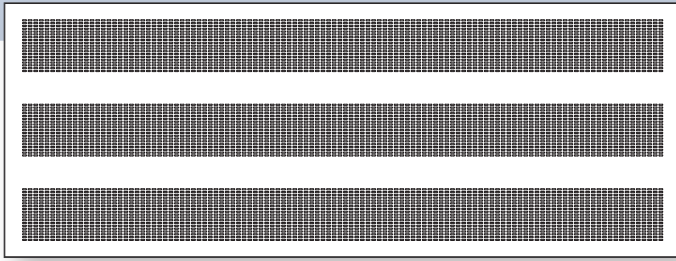


## PERFORMANCE

- A 2-sl, d0 (non-flammable) according to DIN EN 13501
- Maximum Relative Humidity: 90%
- Recycled Content: 96%
- NRC: Up to .70

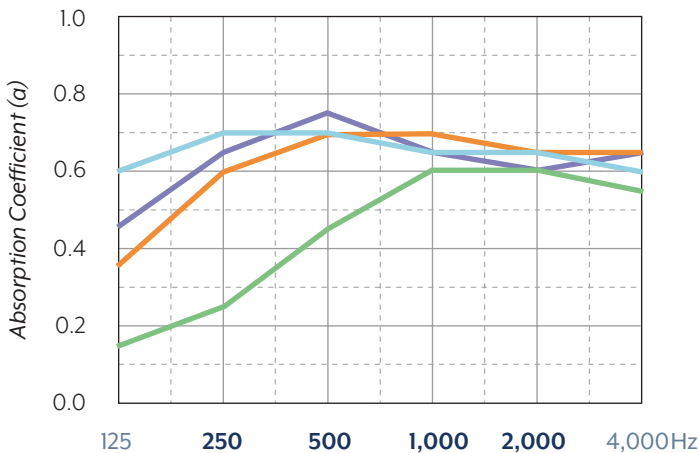


125	250	500	1,000	2,000	4,000Hz
0.15	0.25	0.45	0.60	0.60	0.55
0.35	0.60	0.70	0.70	0.65	0.65
0.35	0.65	0.75	0.65	0.60	0.65
0.60	0.70	0.70	0.65	0.65	0.70

- Cavity Depth = 65mm (~3")
- Cavity Depth = 65mm (~3") with 50mm (~2") Mineral Wool
- Cavity Depth = 200mm (~8")
- Cavity Depth = 200mm (~8") with 50mm (~2") Mineral Wool

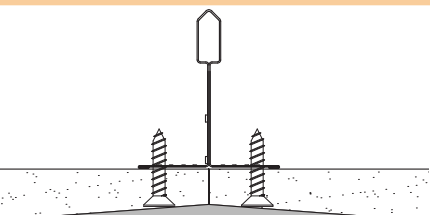

Factory tapers on all 4 edges of Gypsorb Stratum panels. Joints are taped and filled with standard joint tape and compound.

## STRATUM SLOTTED S-3/1924

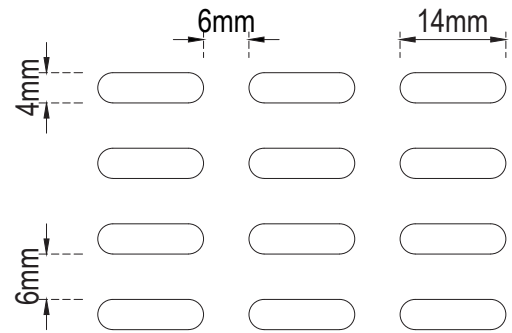

Not to Scale

## CHARACTERISTICS


Perforation type:	4mm x 14mm (@6mm)
Board Thickness:	1/2" (12.5mm)
Non-woven Fabric Backing:	Light Gray
Finish:	Unfinished paper face
Open Area:	15.8%
Weight:	1.88 lbs/s.f. MAX

## AVAILABLE BOARD SIZES

900mm x 2400mm (~35.43" x 94.49")

# Panel Layout

## STRATUM SLOTTED S-3/1924

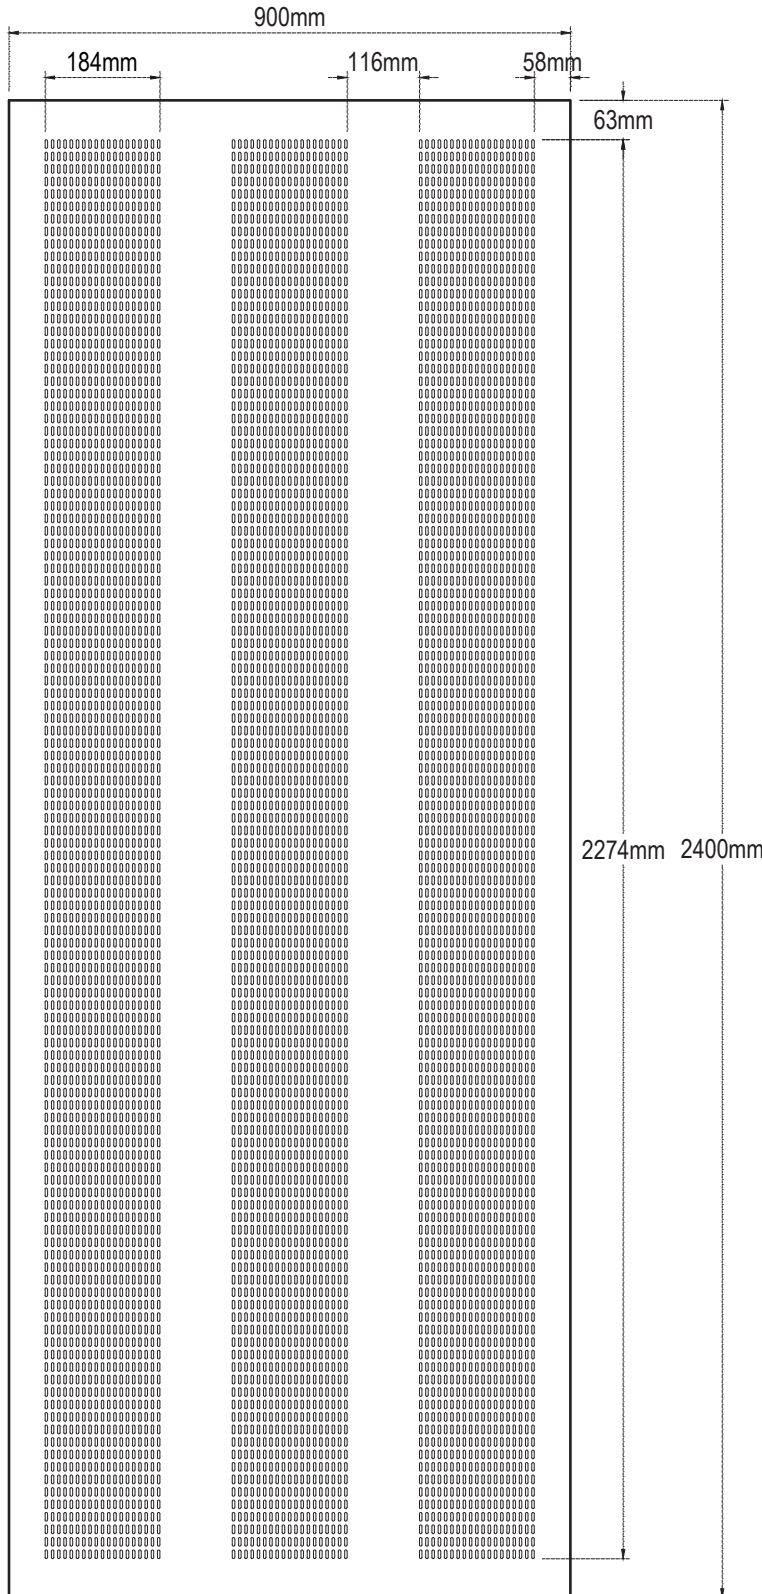

### BOARD SIZE

900mm x 2400mm x 12.5mm  
(~35.43" x 94.49" x 1/2")

