

## Stratum

Gypsorb Stratum panels are high density gypsum panels with a variety of perforation patterns and shapes outlined with nonperforated gypsum margins. Installation is made easy using a 4 sided taper design.


#### **PERFORMANCE**

A 2-s1, d0 (non-flammable) according to DIN EN 13501

Maximum Relative Humidity: 90%

Recycled Content: 96%


)) NRC: Up to .75

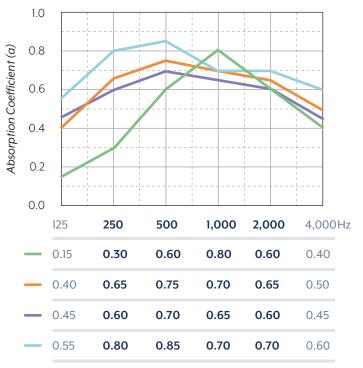

- Cavity Depth = 65mm (~3")
- Cavity Depth = 65mm (~3") with 50mm (~2") Mineral Wool
- Cavity Depth = 200mm (~8")
- Cavity Depth = 200mm (~8") with 50mm (~2") Mineral Wool

Factory tapers on all 4 edges of Gypsorb Stratum panels. Joints are taped and filled with standard joint tape and compound.

# STRATUM SQUARE Q-1/3 927

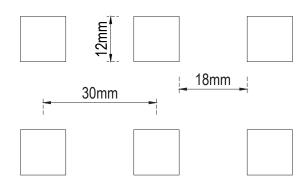

Not to Scale

#### **CHARACTERISTICS**

Perforation type:	12mm x 12mm (30mm o.c.)
Board Thickness:	1/2" (12.5mm)
Non-woven Fabric Backing:	Gray
Finish:	Unfinished paper face
Open Area:	13.0%
Weight:	1.88 lbs/s.f. MAX


#### **AVAILABLE BOARD SIZES**

900mm x 2700mm (~35.43" x 106.30")



## **Panel Layout**

### STRATUM SQUARE Q-1/3 927

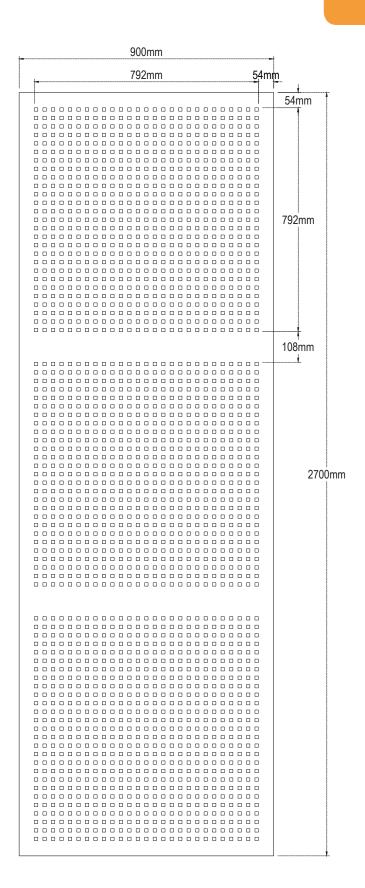

#### **BOARD SIZE**

900mm x 2700mm x 12.5mm (~35.43"x 106.30"x 1/2")

