



Stratum

GypSorb Stratum panels are high density gypsum panels with a variety of perforation patterns and shapes outlined with non-perforated gypsum margins. Installation is made easy using a 4 sided taper design.

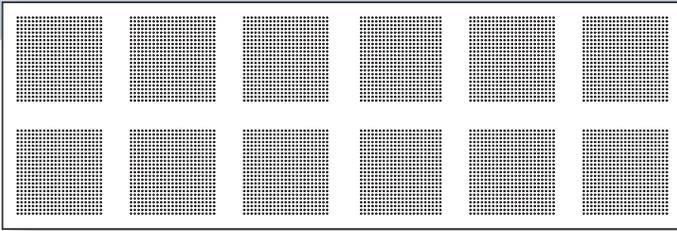


PERFORMANCE

-  A 2-s1, d0 (non-flammable) according to DIN EN 13501
-  Maximum Relative Humidity: 90%
-  Recycled Content: 96%
-  NRC: Up to .60

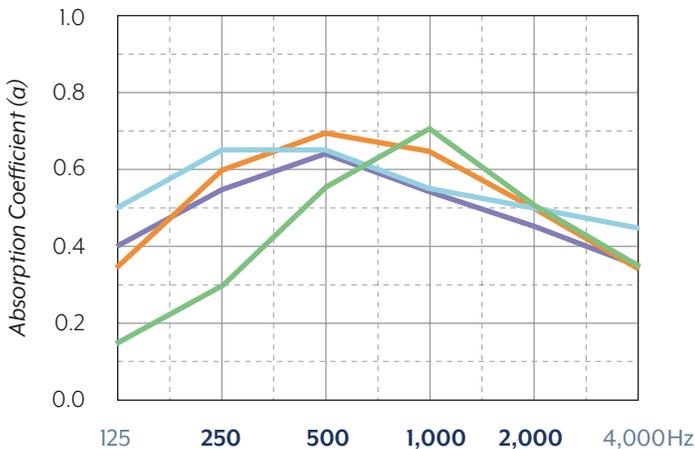


| | | | | | | |
|---|------|------|------|------|------|------|
| — | 0.15 | 0.30 | 0.55 | 0.70 | 0.50 | 0.35 |
| — | 0.35 | 0.60 | 0.70 | 0.65 | 0.50 | 0.45 |
| — | 0.40 | 0.55 | 0.65 | 0.55 | 0.45 | 0.35 |
| — | 0.50 | 0.65 | 0.65 | 0.55 | 0.50 | 0.45 |

-  Cavity Depth = 65mm (~3")
-  Cavity Depth = 65mm (~3") with 50mm (~2") Mineral Wool
-  Cavity Depth = 200mm (~8")
-  Cavity Depth = 200mm (~8") with 50mm (~2") Mineral Wool

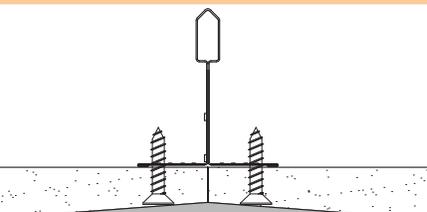

Factory tapers on all 4 edges of GypSorb Stratum panels. Joints are taped and filled with standard joint tape and compound.

STRATUM ROUND R-2/6 927

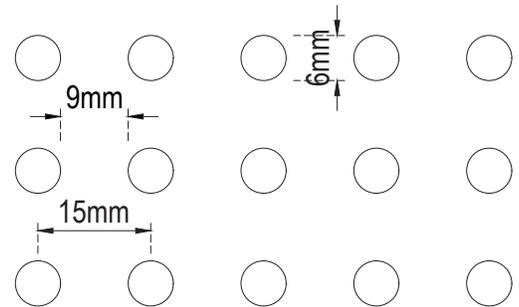

Not to Scale

CHARACTERISTICS


| | |
|---------------------------|-----------------------|
| Perforation type: | 6mm x 6mm (15mm o.c.) |
| Board Thickness: | 1/2" (12.5mm) |
| Non-woven Fabric Backing: | Gray |
| Finish: | Unfinished paper face |
| Open Area: | 7.1% |
| Weight: | 1.88 lbs/s.f. MAX |

AVAILABLE BOARD SIZES

900mm x 2700mm (~35.43" x 106.30") 

Panel Layout

STRATUM ROUND R-2/6 927

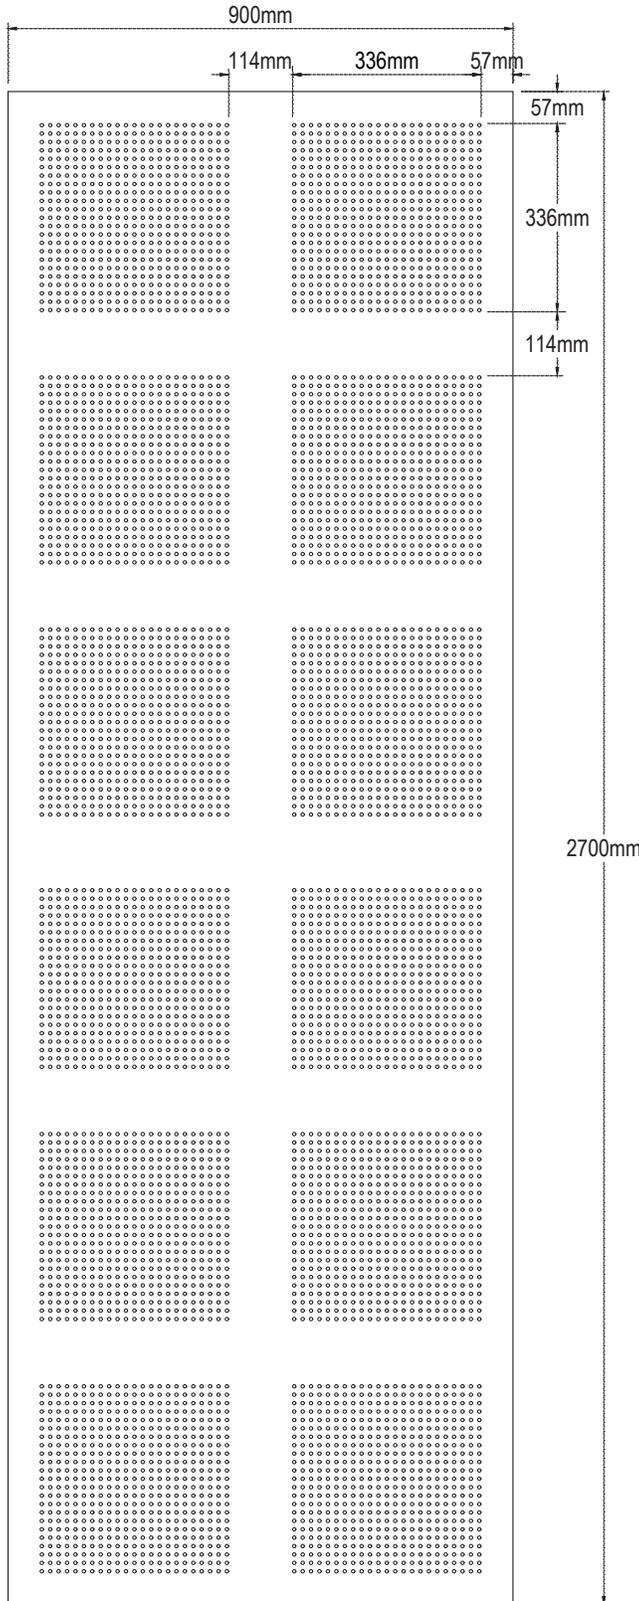

BOARD SIZE

900mm x 2700mm x 12.5mm
(~35.43" x 106.30" x 1/2")